


# LED COURTESY LIGHT

CABIN  
DENMARK

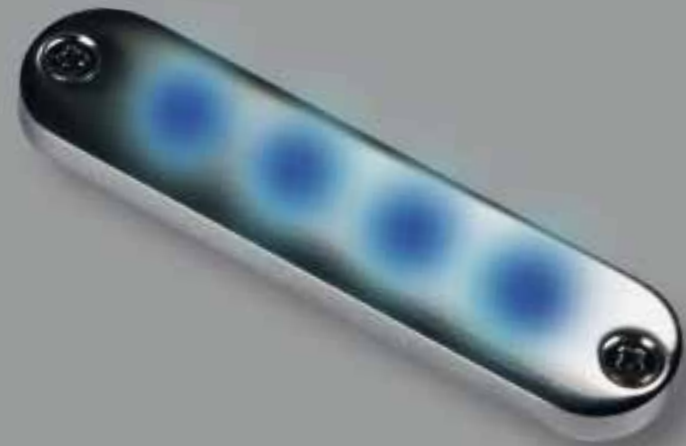

WORLD CLASS YACHT LIGHTS  
SINCE 1977

# LED 1000


Surface mounted LED courtesy light made of white lacquered aluminum.

LED 1000 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.  
The lifetime of the LEDs is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guarantees steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



1000WHRE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	White lacquered	blue	12	1000WH BL IP65
Aluminum	White lacquered	red	12	1000WH RE IP65
Aluminum	White lacquered	white	12	1000WH WH IP65
Aluminum	White lacquered	blue	24	1000WH BL IP65 24V
Aluminum	White lacquered	red	24	1000WH RE IP65 24V
Aluminum	White lacquered	white	24	1000WH WH IP65 24V

# LED 1006


Surface mounted LED courtesy light made of stainless steel.

LED 1000 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W. The lifetime of the LEDs is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guarantees steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



1006BL IP65



1006RE IP65



1006WH IP65

Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1006BL IP65
Stainless steel	highly finished	red	12	1006RE IP65
Stainless steel	highly finished	white	12	1006WH IP65
Stainless steel	highly finished	blue	24	1006BL IP65 24V
Stainless steel	highly finished	red	24	1006RE IP65 24V
Stainless steel	highly finished	white	24	1006WH IP65 24V

# LED 1008


Surface mounted LED courtesy light made of black anodized aluminum.

LED 1000 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W. The lifetime of the LEDs is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guarantees steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



1008WH IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1008BL IP65
Aluminum	black anodized	red	12	1008RE IP65
Aluminum	black anodized	white	12	1008WH IP65
Aluminum	black anodized	blue	24	1008BL IP65 24V
Aluminum	black anodized	red	24	1008RE IP65 24V
Aluminum	black anodized	white	24	1008WH IP65 24V

# LED 1009


Surface mounted LED courtesy light made of titan anodized aluminum.

LED 1009 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.  
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	6	0.25



1009WH IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12	1009BL IP65
Aluminum	titan anodized	red	12	1009RE IP65
Aluminum	titan anodized	white	12	1009WH IP65
Aluminum	titan anodized	blue	24	1009BL IP65 24V
Aluminum	titan anodized	red	24	1009RE IP65 24V
Aluminum	titan anodized	white	24	1009WH IP65 24V


# LED 1010

Surface mounted LED courtesy light made of white laquered aluminum.


LED 1010 series illuminates from 4 lenses.  
IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W.  
The lifetime of the LED's is more than 50.000h.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20



1010WH BL IP65

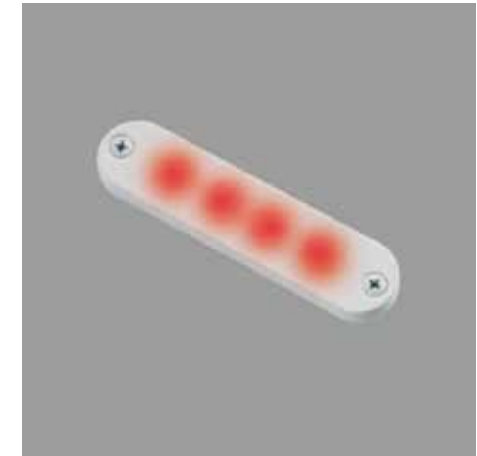

1010WH RE IP65



1009WH WH IP65



1010WH YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	White lacquered	blue	12	1010WH BL IP65
Aluminum	White lacquered	red	12	1010WH RE IP65
Aluminum	White lacquered	white	12	1010WH WH IP65
Aluminum	White lacquered	yellow	12	1010WH YE IP65
Aluminum	White lacquered	blue	24	1010WH BL IP65 24V
Aluminum	White lacquered	red	24	1010WH RE IP65 24V
Aluminum	White lacquered	white	24	1010WH WH IP65 24V
Aluminum	White lacquered	yellow	24	1010WH YE IP65 24V

# LED 1016


Surface mounted LED courtesy light made of stainless steel.

LED 1016 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,3W. The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guarantees steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20



1016BL IP65

Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1016BL IP65
Stainless steel	highly finished	red	12	1016RE IP65
Stainless steel	highly finished	white	12	1016H IP65
Stainless steel	highly finished	yellow	12	1016YE IP65
Stainless steel	highly finished	blue	24	1016BL IP65 24V
Stainless steel	highly finished	red	24	1016RE IP65 24V
Stainless steel	highly finished	white	24	1016WH IP65 24V
Stainless steel	highly finished	yellow	24	1016YE IP65 24V

# LED 1018



Surface mounted LED courtesy light made of black anodized laquered aluminum.

LED 1010 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.


Power consumption is only 0,3W.  
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20

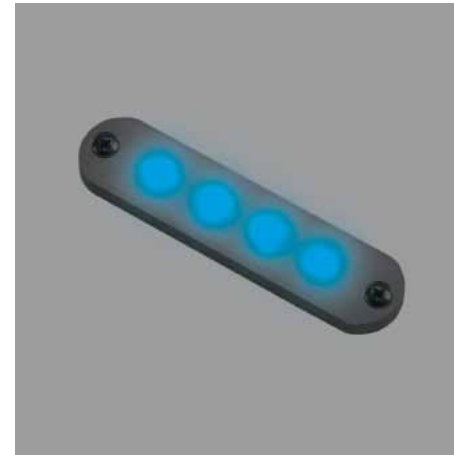


1018BL IP65

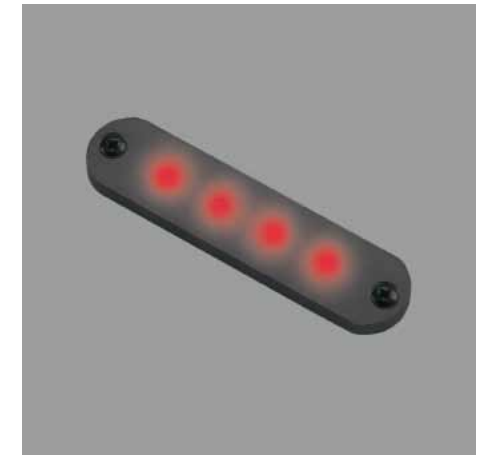

1018RE IP65



1018WH IP65

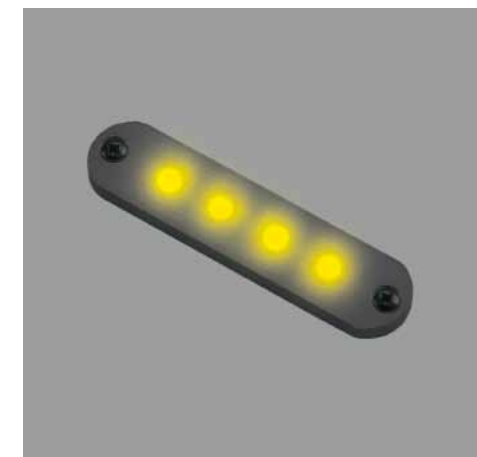

1018YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1018BL IP65
Aluminum	black anodized	red	12	1018RE IP65
Aluminum	black anodized	white	12	1018WH IP65
Aluminum	black anodized	yellow	12	1018YE IP65
Aluminum	black anodized	blue	24	1018BL IP65 24V
Aluminum	black anodized	red	24	1018RE IP65 24V
Aluminum	black anodized	white	24	1018WH IP65 24V
Aluminum	black anodized	yellow	24	1018YE IP65 24V



# LED 1019



Surface mounted LED courtesy light made of titan anodized aluminium.

LED 1010 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.


Power consumption is only 0,3W.  
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20

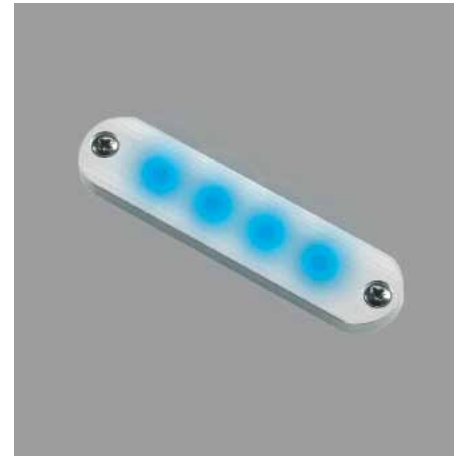

1019BL IP65

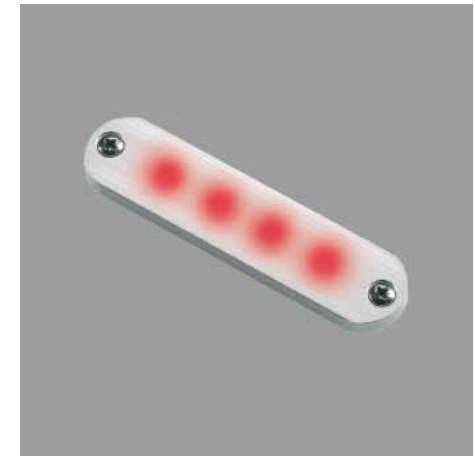

1019RE IP65



1019WH IP65



1019YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12	1019BL IP65
Aluminum	titan anodized	red	12	1019RE IP65
Aluminum	titan anodized	white	12	1019WH IP65
Aluminum	titan anodized	yellow	12	1019YE IP65
Aluminum	titan anodized	blue	24	1019BL IP65 24V
Aluminum	titan anodized	red	24	1019RE IP65 24V
Aluminum	titan anodized	white	24	1019WH IP65 24V
Aluminum	titan anodized	yellow	24	1019YE IP65 24V

# LED 1030-2

Semi surface mounted LED light made of brass.

Very discrete step light and night light for classic yachts.

Illuminates from one opal defuser.  
No visible LED dots.


Power consumption is only 0,3W.

The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

\* Custom made finish to fit your demand.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	20	0.78



1030-2CBL

Material	Finish	LED	Volt	Part. No.
Brass	Custom	blue	12V	1030-2*BL
Brass	Custom	red	12V	1030-2*RE
Brass	Custom	warm white	12V	1030-2*WW
Brass	Custom	yellow	12V	1030-2*YE
Brass	Custom	blue	24V	1030-2*BL 24V
Brass	Custom	red	24V	1030-2*RE 24V
Brass	Custom	warm white	24V	1030-2*WW 24V
Brass	Custom	yellow	24V	1030-2*YE 24V

# LED 1036-2

NEW

Semi surface mounted LED light made of stainless steel.  
Very discrete step light and night light for classic yachts.


Illuminates from one opal defuser.  
No visible LED dots.

Power consumption is only 0,3W.  
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

\* Custom made finish to fit your demand.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	20	0.78



1036-2BL

Material	Finish	LED	Volt	Part. No.
Stainless steel	Custom	blue	12V	1036-2*BL
Stainless steel	Custom	red	12V	1036-2*RE
Stainless steel	Custom	warm white	12V	1036-2*WW
Stainless steel	Custom	yellow	12V	1036-2*YE
Stainless steel	Custom	blue	24V	1036-2*BL 24V
Stainless steel	Custom	red	24V	1036-2*RE 24V
Stainless steel	Custom	warm white	24V	1036-2*WW 24V
Stainless steel	Custom	yellow	24V	1036-2*YE 24V

# LED 1038

Semi surface mounted LED courtesy light made of anodized aluminum.

LED 1038 series illuminates from one lens with a 30° light cone.


Ideal step light and night light for indoor use.

Power consumption is only 0,3W.

The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	12	0.45



1038RE

Material	Finish	LED	Volt	Part. No.
Aluminum	Black anodized	blue	12V	1038BL
Aluminum	Black anodized	red	12V	1038RE
Aluminum	Black anodized	white	12V	1038WH
Aluminum	Black anodized	yellow	12V	1038YE
Aluminum	Black anodized	blue	24V	1038BL 24V
Aluminum	Black anodized	red	24V	1038RE 24V
Aluminum	Black anodized	white	24V	1038WH 24V
Aluminum	Black anodized	yellow	24V	1038YE 24V

# LED 1039

Semi surface mounted LED courtesy light made of titan anodized aluminum.

LED 1039 series illuminates from one lens with a 30° light cone.


Ideal step light and night light for indoor use.

Power consumption is only 0,3W.

The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	12	0.45



1039BL

Material	Finish	LED	Volt	Part. No.
Aluminum	Titan anodized	LED blue	12V	1039BL
Aluminum	Titan anodized	LED red	12V	1039RE
Aluminum	Titan anodized	LED white	12V	1039WH
Aluminum	Titan anodized	LED yellow	12V	1039YE
Aluminum	Titan anodized	LED blue	24V	1039BL 24V
Aluminum	Titan anodized	LED red	24V	1039RE 24V
Aluminum	Titan anodized	LED white	24V	1039WH 24V
Aluminum	Titan anodized	LED yellow	24V	1039YE 24V

# LED 1039-2


Semi surface mounted LED light made of aluminum - titan anodized.  
Very discrete step light and night light for classic yachts.

Illuminates from one opal defuser.  
No visible LED dots.

Power consumption is only 0,5W.  
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	90	3.55
B	25	0.99
C	5	0.20
D	20	0.78



1039-2RE

Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12V	1039-2BL
Aluminum	titan anodized	red	12V	1039-2RE
Aluminum	titan anodized	warm white	12V	1039-2WW
Aluminum	titan anodized	yellow	12V	1039-2YE
Aluminum	titan anodized	blue	24V	1039-2BL 24V
Aluminum	titan anodized	red	24V	1039-2RE 24V
Aluminum	titan anodized	warm white	24V	1039-2WW 24V
Aluminum	titan anodized	yellow	24V	1039-2YE 24V



**X-YACHTS OF DENMARK**  
CURTESY LIGHT 1039-2RE  
IN X-65

# LED 1116


Surface mounted LED courtesy light made of stainless steel.

LED 1016 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.  
The lifetime of the LED's is more than 50.000h.

An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Dimensions	mm	in
A	82	3.23
B	20	0.78
C	5	0.20



1116RE IP65

Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1116BL IP65
Stainless steel	highly finished	red	12	1116RE IP65
Stainless steel	highly finished	white	12	1116H IP65
Stainless steel	highly finished	yellow	12	1116YE IP65
Stainless steel	highly finished	blue	24	1116BL IP65 24V
Stainless steel	highly finished	red	24	1116RE IP65 24V
Stainless steel	highly finished	white	24	1116WH IP65 24V
Stainless steel	highly finished	yellow	24	1116YE IP65 24V



LED STRIPS  
NEON STRIPS

CABIN  
DENMARK



# NEON STRIPS

## 4x10mm

LED NEON strips open up new smart lighting options. No visible LED dots.

Low power consumption and heat.  
Integrated LED driver regulate voltage fluctation and garanties steady light output.  
Lifetime of the LED's is more than 50.000h.

5m standard length.  
Cutting per 25mm 12V, 50mm 24V  
Custom length on request.  
Max length 15m.

IP66

Design	LED	Volt	Watt	Kelvin	RA	Part. No.
N-SERIES	144/m	12V	10W	2700k	>90	N 4X10 10W 12V 27K
N-SERIES	144/m	24V	10W	2700k	>90	N 4X10 10W 24V 27K



# NEON STRIPS

## 6x12mm

CABIN  
DENMARK

LED NEON strips open up new smart lighting options. No visible LED dots.

Low power consumption and heat.  
Integrated LED driver regulate voltage fluctation and garanties steady light output.  
Lifetime of the LED's is more than 50.000h.

5m standard length.  
Cutting per 25mm 12V, 50mm 24V  
Custom length on request.  
Max length 15m.

IP66

Design	LED	Volt	Watt	Kelvin	RA	Part. No.
N-SERIES	144/m	12V	10W	2700k	>90	N 6X12 10W 12V 27K
N-SERIES	144/m	24V	10W	2700k	>90	N 6X12 10W 24V 27K



# NEON STRIPS

## 10X10mm

CABIN  
DENMARK

LED NEON strips open up new smart lighting options. No visible LED dots.

Low power consumption and heat.  
Integrated LED driver regulate voltage fluctation and garanties steady light output.  
Lifetime of the LED's is more than 50.000h.

5m standard length.  
Cutting per 20,83mm 12V, 41,67mm 24V  
Custom length on request.  
Max length 15m.

IP66

Design	LED	Volt	Watt	Kelvin	RA	Part. No.
N-SERIES	144/m	12V	10W	2700k	>90	N 10x10 10W 12V 27K
N-SERIES	144/m	24V	10W	2700k	>90	N 10x10 10W 24V 27K



# LED STRIPS

## S-SERIES

LED strips for accent and background lighting.

Low power consumption and heat.  
Silicon protection to IP65. 3M tape on back.  
Integrated LED driver regulate voltage fluctation and garanties steady light output.  
Lifetime of the LED's is more than 50.000h.

5m standard length.  
Cutting per 50mm 12V, 100mm 24V  
Custom length on request.

IP65

Design	LED	Volt	Watt	Kelvin	RA	Part. No.
S-SERIES	60/m	12V	5W	2700k	>90	S 10 5W 12V 27K IP65
S-SERIES	60/m	12V	10W	2700k	>90	S 10 10W 12V 27K IP65
S-SERIES	60/m	24V	5W	2700k	>90	S 10 5W 24V 27K IP65
S-SERIES	60/m	24V	10W	2700k	>90	S 10 10W 24V 27K IP65

